

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
10 February 2005 (10.02.2005)

PCT

(10) International Publication Number  
WO 2005/013409 A1

(51) International Patent Classification<sup>7</sup>: H01M 10/48, H02J 7/00

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number: PCT/NZ2004/000141

(22) International Filing Date: 2 July 2004 (02.07.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data: 60/484,571 2 July 2003 (02.07.2003) US


(71) Applicant (for all designated States except US): IVEN-SYS ENERGY SYSTEMS (NZ) LIMITED [NZ/NZ]; 39 Princess Street, Christchurch, 8004 (NZ).

(72) Inventors; and

(75) Inventors/Applicants (for US only): ANBUKY, Adrian, H [NZ/NZ]; 23 Heath Street, Christchurch, 8005 (NZ). HUNTER, Phillip [NZ/NZ]; C/o Invensys Energy Systems, 39 Princess Street, Christchurch, 8004 (NZ).

(74) Agent: BALDWINS; PO Box 5999, Wellesley Street, Auckland, 1001 (NZ).

(54) Title: BATTERY FLOAT MANAGEMENT

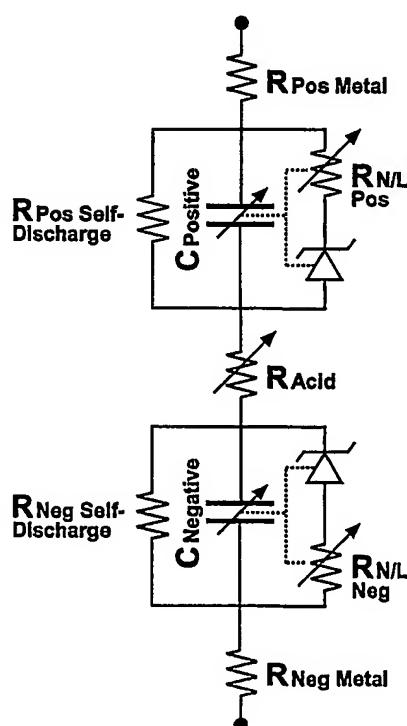

(57) Abstract: The invention relates to a new VRLA battery float model. The model covers the steady state and transient float charge behaviour of both positive and negative electrodes. Backup analysis verifies the internal polarisation distribution for a conventional 2V-cell polarisation behaviours can be identified without the need for a physical reference electrode. The estimated individual electrode polarisation allows early detection of common failure modes like negative plate discharge as well as a reference for float voltage optimisation. Furthermore, the positive polarisation relating to minimum grid corrosion may be correlated with the occurrence of the peak of a "Tafel" like resistance used by the model. The model encourages utilisation of low signal perturbation for testing a cell's state of health and state of charge conditions while at float.

WO 2005/013409 A1